




WATER SERVICES ASSOCIATION  
*of Australia*

# SEWERAGE CODE

of Australia

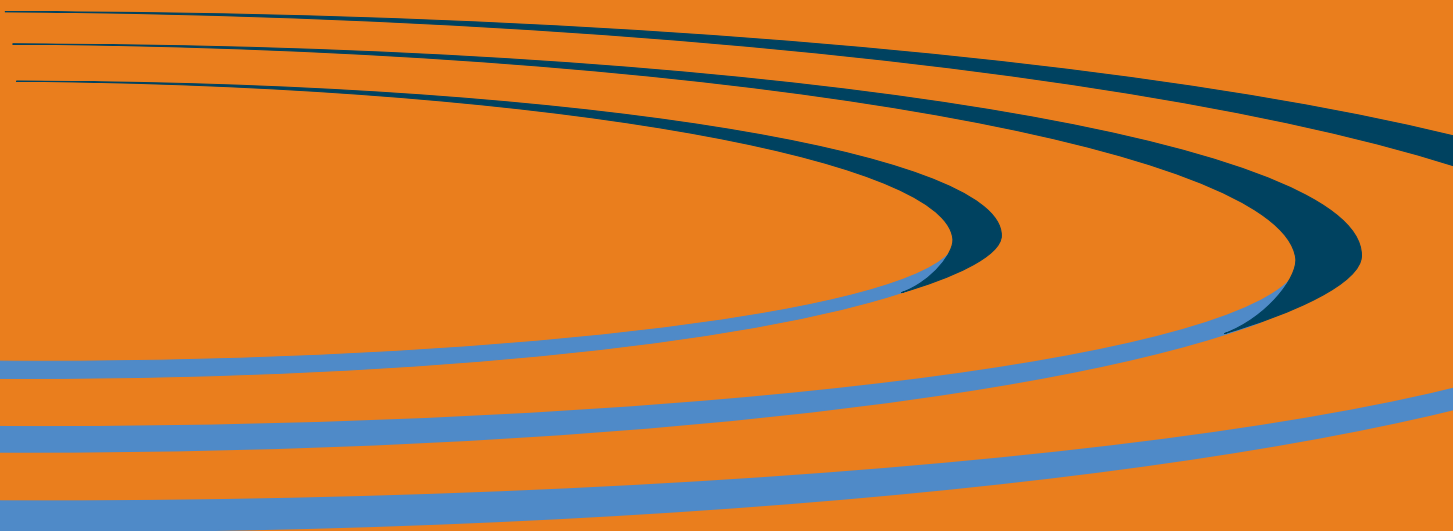

WSA 02-2002  
Version 2.3



WATER SERVICES ASSOCIATION  
*of Australia*

# **Sewerage Code of Australia**

**WSA 02—2002**

**Second Edition**

**Version 2.3**

Previous edition WSA 02—1999

## CONTENTS

<b>PREFACE</b>	<b>6</b>
<b>INTRODUCTION</b>	<b>9</b>
<b>PART 0: GLOSSARY OF TERMS AND ABBREVIATIONS</b>	
I Glossary of Terms	12
II Abbreviations	22
III Referenced Documents	25
IV Other References	29
<b>PART 1: PLANNING AND DESIGN</b>	
Contents	32
1 General	38
2 System Planning	45
3 Flow Estimation	52
4 Detail Design	54
5 Property Connection	77
6 Maintenance Structures	80
7 Ancillary Structures	87
8 Structural Design	95
9 Design Review and Drawings	100
Appendix A Estimation of Equivalent Population (EP)	104
Appendix B Flow Estimation for Undeveloped Areas	110
Appendix C Gauging of Sewer Overflows, Flows, Levels and Velocities	116
Appendix D Computer Flow Modelling	119
Appendix E Analysis of Flow Gauging Results from Existing Systems	120
<b>PART 2: PRODUCTS AND MATERIALS</b>	
Contents	122
10 Products and Materials Overview	123
Appendix F Quality Assurance of Products and Materials	140
<b>PART 3: CONSTRUCTION</b>	
Contents	148
11 General	153
12 Quality	155
13 General Construction	158
14 Products and Materials	164
15 Excavation	169

16 Bedding for Pipes and Maintenance Structures	171
17 Pipe Laying and Jointing	172
18 Maintenance Holes (MHs)	179
19 Maintenance Shafts (MS and TMS) and Inspection Shafts (IS)	182
20 Pipe Embedment and Support	183
21 Fill	186
22 Acceptance Testing	188
23 Tolerances on As-Constructed Work	202
24 Connections to Existing Sewers	204
25 Restoration	205
26 Work As Constructed Details	207
Appendix G Ovality Testing of PVC and GRP Gravity Sewers Default Prover Diameters	208
<b>PART 4: STANDARD DRAWINGS</b>	
Contents	210
27 Introduction	212
28 Listing of Standard Drawings	213
29 Commentary on SEW 1100 Series – Pipeline Layout	215
30 Commentary on SEW 1200 Series – Embedment and Trench Fill	219
31 Commentary on SEW 1300 Series – Maintenance Structures	227
32 Commentary on SEW 1400 Series – Special Crossings / Structures Arrangements	231
32 Commentary on SEW 1500 Series – Insertion and Repair Systems	234
<b>STANDARD DRAWINGS</b>	237
SEW-1100 Series Drawings – Pipeline Layout	
SEW-1200 Series Drawings – Embedment, Trench Fill and Support Systems	
SEW-1300 Series Drawings – Access Structures	
SEW-1400 Series Drawings – Special Crossings / Structures Arrangements	
SEW–1500 Series Drawings – Connections to Existing Systems	



WATER SERVICES ASSOCIATION  
*of Australia*

# **Sewerage Code of Australia**

## **Part 1: Planning and Design**

**Second Edition**

**Version 2.3**

## CONTENTS

### 1 GENERAL

- 1.1 SCOPE
- 1.2 PURPOSE AND APPLICATION
- 1.3 PLANNING AND DESIGN RESPONSIBILITIES AND INTERFACES
  - 1.3.1 General
  - 1.3.2 Planning responsibilities
  - 1.3.3 Design responsibilities
  - 1.3.4 Consultation with other parties
- 1.4 SEWER SYSTEM DESIGN APPROACH
  - 1.4.1 System design life
  - 1.4.2 Objectives of the system design
  - 1.4.3 Design output

### 2 SYSTEM PLANNING

- 2.1 SEWERAGE SYSTEM PHILOSOPHY AND DEFINITION
  - 2.1.1 Disaggregation
  - 2.1.2 Level 1 Total system
  - 2.1.3 Level 2 Transportation subsystems
  - 2.1.4 Level 3 Operating units
    - 2.1.4.1 Sewers
    - 2.1.4.2 Sewage pumping stations
    - 2.1.4.3 Storage
- 2.2 PLANNING PRINCIPLES
  - 2.2.1 Planning horizon
  - 2.2.2 Concept Plan
  - 2.2.3 Catchment analysis
  - 2.2.4 Provision for future gauging needs
  - 2.2.5 Terrorism
- 2.3 PLANNING PARAMETERS
  - 2.3.1 Loading per serviced property
  - 2.3.2 Assessment of future loads
  - 2.3.3 Assessment of existing system loads
  - 2.3.4 Environmental considerations
  - 2.3.5 Geotechnical investigations
  - 2.3.6 Operations and maintenance considerations
- 2.4 SEWAGE QUALITY
  - 2.4.1 Septicity
  - 2.4.2 Sewage quality / Trade waste management
- 2.5 PLANNING REVIEW

### 3 FLOW ESTIMATION

- 3.1 DESIGN FLOW ESTIMATION
- 3.2 DESIGN FLOW ESTIMATION METHOD
  - 3.2.1 General
  - 3.2.2 Traditional design flow estimation method
  - 3.2.3 Design flow estimation incorporating existing systems
  - 3.2.4 Design flow estimation—Partially pumped systems
  - 3.2.5 Flow schedule

### 4 DETAIL DESIGN

- 4.1 DETAIL DESIGN PROCESS
- 4.2 DETAIL DESIGN CONSIDERATIONS
  - 4.2.1 Catchment design
  - 4.2.2 Design accuracy
  - 4.2.3 Sewer layout
  - 4.2.4 Environmental considerations

- 4.2.4.1 General
- 4.2.4.2 Urban salinity
- 4.2.4.3 Vegetation
- 4.2.4.4 Contaminated sites
- 4.2.4.5 Tidal zones
- 4.2.5 Easements
- 4.2.6 Disused sewers
- 4.2.7 Special design considerations
- 4.3 HORIZONTAL ALIGNMENT OF SEWERS
  - 4.3.1 General
  - 4.3.2 Roads, reserves and open space
  - 4.3.3 Railway reserves
  - 4.3.4 Public and private property
  - 4.3.5 Changes in direction using an MH
  - 4.3.6 Dead-ends
  - 4.3.7 Horizontal curves in sewers
- 4.4 OBSTRUCTIONS AND CLEARANCES
  - 4.4.1 General
  - 4.4.2 Surface obstructions
  - 4.4.3 Clearance from transmission towers and power lines
  - 4.4.4 Clearance from structures
  - 4.4.5 Underground obstructions and services
    - 4.4.5.1 General
    - 4.4.5.2 Clearance requirements
- 4.5 PIPE SIZING AND GRADING
  - 4.5.1 General
  - 4.5.2 Environmental protection requirements
  - 4.5.3 Minimum air space for ventilation
  - 4.5.4 Minimum pipe sizes for maintenance purposes
  - 4.5.5 Maximum EP for reticulation sewers
  - 4.5.6 Limitation on sewer size reduction
  - 4.5.7 Minimum grades for self-cleansing
    - 4.5.7.1 General
    - 4.5.7.2 Reticulation sewers
    - 4.5.7.3 Property connection sewers and ends of lines
  - 4.5.8 Minimum grades for slime control
  - 4.5.9 Maximum grades for septicity
    - 4.5.9.1 Branch and trunk sewers
    - 4.5.9.2 Reticulation sewers
- 4.6 VERTICAL ALIGNMENT OF SEWERS
  - 4.6.1 General
  - 4.6.2 Long section design plan
  - 4.6.3 Minimum cover over sewers
  - 4.6.4 Lot servicing requirements
    - 4.6.4.1 General
    - 4.6.4.2 Serviced area requirements for residential lots
    - 4.6.4.3 Serviced area requirements for industrial and commercial lots
    - 4.6.4.4 Partial lot service
    - 4.6.4.5 Servicing of basements
  - 4.6.5 Minimum depth of sewer connection point
    - 4.6.5.1 General
    - 4.6.5.2 Soffit requirement
    - 4.6.5.3 Physical losses in customer sanitary drains
    - 4.6.5.4 Depth of connection point
  - 4.6.6 Grading through MHs
    - 4.6.6.1 General
    - 4.6.6.2 Internal fall through MHs joining sewers of same diameter

- 4.6.6.3 Internal falls through MHs joining sewers of different diameters
- 4.6.6.4 Large falls at MHs
- 4.6.6.5 Effect of steep grade—hydraulic jump
- 4.6.7 Vertical curves
- 4.6.8 Compound bends
- 4.7 CORROSION PREVENTION
  - 4.7.1 General
  - 4.7.2 Internal corrosion
  - 4.7.3 External corrosion
- 4.8 STEEL SEWERS
  - 4.8.1 Sizes and configurations
  - 4.8.2 Joints
  - 4.8.3 Field welding
  - 4.8.4 Flanged joints

## **5 PROPERTY CONNECTION**

- 5.1 GENERAL
- 5.2 LIMITATIONS OF CONNECTION TO SEWERS
- 5.3 METHODS OF THE PROPERTY CONNECTION
  - 5.3.1 General
  - 5.3.2 IO interface method
  - 5.3.3 Buried interface method
- 5.4 MAXIMUM DEPTH OF PROPERTY CONNECTION
- 5.5 NUMBER OF PROPERTY CONNECTIONS
  - 5.5.1 Single occupancy lots
  - 5.5.2 Multiple occupancy lots
- 5.6 LOCATION OF CONNECTION POINTS
  - 5.6.1 Undeveloped lots
  - 5.6.2 Developed lots
- 5.7 Y – PROPERTY CONNECTIONS
- 5.8 LENGTH OF PROPERTY CONNECTION SEWERS

## **6 MAINTENANCE STRUCTURES**

- 6.1 TYPES OF MAINTENANCE STRUCTURES
- 6.2 LOCATIONS OF MAINTENANCE STRUCTURES
- 6.3 SPACING OF MAINTENANCE STRUCTURES
  - 6.3.1 General
  - 6.3.2 Maintenance structure spacing—Reticulation sewers
  - 6.3.3 Maintenance structure spacing—Branch and trunk sewers
- 6.4 SPECIAL CONSIDERATIONS FOR LOCATION OF MAINTENANCE STRUCTURES
- 6.5 SPECIAL CONSIDERATIONS FOR CONNECTION OF NEW SEWERS TO EXISTING SEWERS
- 6.6 MAINTENANCE HOLES (MH)
  - 6.6.1 General
  - 6.6.2 Types of MH construction
  - 6.6.3 Design parameters for MHs
  - 6.6.4 Property connections into MHs
  - 6.6.5 Diameters of MHs
  - 6.6.6 MH base layout
  - 6.6.7 Flotation
  - 6.6.8 Ladders, step irons and landings
  - 6.6.9 MH covers
  - 6.6.10 Cross-fall on MH covers
- 6.7 MAINTENANCE SHAFTS (MS)
  - 6.7.1 General
  - 6.7.2 Design parameters for MSs and TMSs
  - 6.7.3 Property connection sewer into MSs and TMSs



## 6.8 OTHER MAINTENANCE STRUCTURES AT INTERFACE OF PROPERTY CONNECTION SEWER AND CUSTOMER DRAINS

### 7 ANCILLIARY STRUCTURES

#### 7.1 GENERAL

#### 7.2 WATER SEALS, BOUNDARY TRAPS AND WATER-SEALED MHS

##### 7.2.1 General design parameters

##### 7.2.2 Water seals on reticulation sewers entering branch or trunk sewers

##### 7.2.3 Water seals on branch sewers entering trunk sewers

#### 7.3 GAS CHECK MHS

##### 7.3.1 General

##### 7.3.2 Design parameters for gas check MHS

#### 7.4 VERTICAL AND NEAR VERTICAL SEWERS

##### 7.4.1 General

##### 7.4.2 Design parameters for bored, exposed and encased vertical and near vertical sewers

#### 7.5 VENTILATION

##### 7.5.1 General

##### 7.5.2 Design parameters for vents

#### 7.6 NEAR-HORIZONTAL BOREHOLES

##### 7.6.1 General

##### 7.6.2 Design requirements

##### 7.6.3 Maintenance requirements

#### 7.7 VORTEX INLETS AND WATER CUSHIONS

#### 7.8 INVERTED SYPHONS

##### 7.8.1 General

##### 7.8.2 Design parameters for inverted syphons

#### 7.9 OVERFLOWS / EMERGENCY RELIEF STRUCTURES (ERS)

##### 7.9.1 General

##### 7.9.2 Design parameters for ERSs

#### 7.10 FLOW MEASURING DEVICES

#### 7.11 WET WEATHER STORAGE

##### 7.11.1 General

##### 7.11.2 Design requirements for wet weather storage

### 8 STRUCTURAL DESIGN

#### 8.1 GENERAL

#### 8.2 PRODUCTS AND MATERIALS

#### 8.3 STRUCTURAL COMPUTATIONS

#### 8.4 EXTERNAL FORCES

#### 8.5 FOUNDATION DESIGN AND GROUND WATER CONTROL

#### 8.6 GEOTECHNICAL CONSIDERATIONS

##### 8.6.1 General

##### 8.6.2 Sewers in engineered or controlled fill

##### 8.6.3 Sewers in non-engineered fill

##### 8.6.4 Filling along route of pipeline

##### 8.6.5 Mine subsidence

##### 8.6.6 Slip areas

##### 8.6.7 Water-charged ground

#### 8.7 ABOVE GROUND CROSSINGS

#### 8.8 PIPE COVER

#### 8.9 TRENCH DESIGN

#### 8.10 BULKHEADS AND TRENCHSTOPS

### 9 DESIGN REVIEW AND DRAWINGS

#### 9.1 DESIGN REVIEW

#### 9.2 DESIGN DRAWINGS

##### 9.2.1 General

##### 9.2.2 Real property information

- 9.2.3 Sewers
- 9.2.4 Structures
- 9.2.5 Longitudinal sections (profiles)
- 9.2.6 Title block notation and standard notes
- 9.2.7 Other
- 9.3 DRAFTING STANDARDS
  - 9.3.1 Scale
  - 9.3.2 Recording of as-constructed information

## **APPENDIX A ESTIMATION OF EQUIVALENT POPULATION (EP)**

- A1 GENERAL
- A2 ESTIMATION METHOD
  - A2.1 Residential component
    - A2.1.1 Single occupancy lots
    - A2.1.2 Multiple occupancy lots—Medium density residential
    - A2.1.3 Multiple occupancy lots—High-density / multi-storey residential
  - A2.2 Commercial and special use components
  - A2.3 Industrial component
    - A2.3.1 General
    - A2.3.2 Use of Tables A2 and A3
- A3 WORKED EXAMPLE FOR AN INDUSTRIAL DEVELOPMENT

## **APPENDIX B FLOW ESTIMATION FOR UNDEVELOPED AREAS**

- B1 GENERAL
- B2 PEAK DRY WEATHER (SANITARY) FLOW
- B3 GWI CALCULATION
- B4 IIF CALCULATION
- B5 WORKED EXAMPLE FOR A RESIDENTIAL DEVELOPMENT
  - B5.1 Description
  - B5.2 Peak dry weather flow (PDWF)
  - B5.3 Ground water infiltration (GWI)
  - B5.4 Rainwater dependent inflow and infiltration (IIF)
  - B5.5 Design flow

## **APPENDIX C GAUGING OF SEWER OVERFLOWS, FLOWS, LEVELS AND VELOCITIES**

- C1 GENERAL
- C2 PRE-CONSTRUCTED FLUMES AND WEIRS
- C3 RETRO-FITTING OF DEVICES
  - C3.1 Flumes and weirs
  - C3.2 Doppler HVQ gauges
  - C3.3 Transit-time HVQ gauges
  - C3.4 Other HVQ type gauges
  - C3.5 Using “H-only” and a rating table at unrated structures
  - C3.6 Flumes and weirs in conjunction with HVQ gauges
- C4 FULL PIPE METERS
- C5 OVERFLOW EVENT RECORDERS

## **APPENDIX D COMPUTER FLOW MODELLING**

## **APPENDIX E ANALYSIS OF FLOW GAUGING RESULTS FROM EXISTING SYSTEMS**

- E1 GENERAL
- E2 PEAK DRY WEATHER FLOW (PLUS GROUNDWATER INFILTRATION)
- E3 INFLOW AND INFILTRATION (WET WEATHER) FLOW (IIF)

## **TABLES**

- TABLE 1.1 TYPICAL ASSET DESIGN LIFE
- TABLE 1.2 PLANNING AND DESIGN APPROACH
- TABLE 4.1 MAXIMUM ALLOWABLE DEFLECTIONS THROUGH A MH

TABLE 4.2	CLEARANCES BETWEEN SEWERS AND OTHER UNDERGROUND SERVICES
TABLE 4.3	MINIMUM PIPE SIZES FOR RETICULATION AND PROPERTY CONNECTION SERVICES
TABLE 4.4	EP CAPACITY LIMITATIONS FOR RETICULATION SEWERS
TABLE 4.5	MANNING COEFFICIENT
TABLE 4.6	ABSOLUTE MINIMUM GRADES
TABLE 4.7	MINIMUM GRADES FOR PROPERTY CONNECTION SEWERS AND PERMANENT ENDS
TABLE 4.8	MINIMUM COVER OVER SEWERS
TABLE 4.9	MINIMUM INTERNAL FALL THROUGH AN MH JOINING RETICULATION SEWERS OF SAME DIAMETER
TABLE 4.10	LIMITATIONS ON LARGE FALLS AT MHS USING INTERNAL AND EXTERNAL DROPS
TABLE 6.1	ACCEPTABLE MH, MS AND TMS OPTIONS FOR RETICULATION SEWERS
TABLE 7.1	MAXIMUM LIMIT OF DEVIATION IN LEVEL AND LINE OF BOREHOLES
TABLE 7.2	DESIGN REQUIREMENT FOR SILT TRAPS
TABLE 7.3	REQUIREMENTS FOR VORTEX INLETS AND WATER CUSHIONS
TABLE 8.1	REQUIREMENTS FOR BULKHEADS
TABLE A1	EQUIVALENT POPULATIONS FOR SYNCHRONOUS DISCHARGES
TABLE A2	NON-SYNCHRONOUS DISCHARGES - LIST OF INDUSTRIES AND THEIR EP CLASSIFICATIONS
TABLE A3	EP OF NON-RESIDENTIAL EP/HA CLASSIFICATIONS
TABLE B1	LEAKAGE SEVERITY COEFFICIENT (C)
TABLE B2	APPROXIMATE VALUES OF 1(1,2) FOR VARIOUS LOCATIONS
TABLE B3	CONTAINMENT FACTOR VERSUS ARI

#### FIGURES

FIGURE 2.1	DISAGGREGATION MODEL FOR TRANSPORTATION SUBSYSTEMS
FIGURE 3.1	FLOW COMPONENTS IN A GRAVITY SYSTEM
FIGURE 4.1	PHYSICAL LOSSES IN CUSTOMER SANITARY DRAINS
FIGURE 4.2	DEPTH OF POINT OF CONNECTION AND USE OF RISERS
FIGURE 6.1	MULTIPLE MS BETWEEN MH AND "LAST" MH/TMS
FIGURE 6.2	MULTIPLE MSS BETWEEN CONSECUTIVE MHS
FIGURE B1	"D" FACTOR VERSUS AREA - AREAS < 40 HA



WATER SERVICES ASSOCIATION  
*of Australia*

# **Sewerage Code of Australia**

## **Part 2: Products and Materials**

**Second Edition**

**Version 2.3**

# CONTENTS

## 10 PRODUCTS AND MATERIALS OVERVIEW

- 10.1 PURPOSE
- 10.2 SCOPE
- 10.3 RESPONSIBILITIES
  - 10.3.1 Water Agency
  - 10.3.2 Designer
  - 10.3.3 Constructor
  - 10.3.4 Purchaser
- 10.4 PRODUCT AND MATERIAL STANDARDS AND SPECIFICATIONS
  - 10.4.1 Product standards
  - 10.4.2 Purchase specifications
  - 10.4.3 Purchase specifications—Alternatives
- 10.5 QUALITY ASSURANCE
  - 10.5.1 Default requirement
  - 10.5.2 Additional information on quality assurance
  - 10.5.3 Innovative products and materials
- 10.6 SELECTION GUIDE FOR PIPELINE SYSTEMS
- 10.7 ADDITIONAL PRODUCT AND MATERIAL INFORMATION

## APPENDIX F QUALITY ASSURANCE OF PRODUCTS AND MATERIALS

- F1 GENERAL
- F2 QUALITY ASSURANCE OPTIONS
  - F2.1 ISO 9000 quality management system certification
  - F2.2 Product certification
    - F2.2.1 Product certification – Type 1
    - F2.2.2 Product certification – Type 3
    - F2.2.3 Product certification – Type 5
  - F2.3 Supplier's declaration of conformance
  - F2.4 Second party verification
- F3 FACTORS INFLUENCING SELECTION OF QUALITY ASSURANCE OPTIONS
  - F3.1 General factors
  - F3.2 Likelihood of manufacturing non-conformance
  - F3.3 Likelihood of failure of pipeline system from a product non-conformance
  - F3.4 Consequences of failure
  - F3.5 Product specification
  - F3.6 Project magnitude / management
  - F3.7 Innovative products
- F4 SELECTING THE QUALITY ASSURANCE OPTION
  - F4.1 General factors
  - F4.2 Product certification
    - F4.2.1 General
    - F4.2.2 Type 1
    - F4.2.3 Type 3
    - F4.2.4 Type 5
  - F4.3 ISO 9000 quality management system certification
  - F4.4 Supplier's declaration of conformance
  - F4.5 Second party verification

## TABLES

- TABLE 10.1 PRINCIPAL GRAVITY SEWER PIPELINE SYSTEMS
- TABLE 10.2 PRINCIPAL SEWERAGE GRAVITY PIPELINE SYSTEMS - PRECAUTIONS, LIMITATIONS ADVANTAGES AND DISADVANTAGES
- TABLE 10.3 PRINCIPAL SEWERAGE PRESSURE PIPELINE SYSTEMS
- TABLE 10.4 PRINCIPAL SEWERAGE PRESSURE PIPELINE SYSTEMS - PRECAUTIONS, LIMITATIONS ADVANTAGES AND DISADVANTAGES



WATER SERVICES ASSOCIATION  
*of Australia*

# **Sewerage Code of Australia**

## **Part 3: Construction**

### **Second Edition**

**Version 2.3**

## CONTENTS

### 11 GENERAL

- 11.1 SCOPE
- 11.2 INTERPRETATION

### 12 QUALITY

- 12.1 QUALITY ASSURANCE
  - 12.1.1 General
  - 12.1.2 Quality system
  - 12.1.3 Project management plan
  - 12.1.4 Inspection and test plans
  - 12.1.5 Quality tests
  - 12.1.6 Quality audits
  - 12.1.7 Traceability
  - 12.1.8 Quality records
  - 12.1.9 Inspection
- 12.2 PERSONNEL QUALIFICATIONS

### 13 GENERAL CONSTRUCTION

- 13.1 GENERAL
- 13.2 ORDER OF CONSTRUCTION, TESTING AND COMMISSIONING
- 13.3 CONTRACT INTERFACES
- 13.4 CUSTOMER FOCUS
  - 13.4.1 General
  - 13.4.2 Resolution of complaints
- 13.5 PROTECTION OF PEOPLE, PROPERTY AND ENVIRONMENT
  - 13.5.1 Safety of people
  - 13.5.2 Protection of other services
  - 13.5.3 Disused / Redundant sewers
  - 13.5.4 Road reserves or other thoroughfares
    - 13.5.4.1 Treatment of pavements and other surfaces
    - 13.5.4.2 Traffic management
    - 13.5.4.3 Cleanliness of roads, paths, accesses and drainage paths
    - 13.5.4.4 Storage of products, materials and equipment
    - 13.5.4.5 Obstruction of street drainage
  - 13.5.5 Private and public properties
  - 13.5.6 Protection of the environment and heritage areas
    - 13.5.6.1 General
    - 13.5.6.2 Collection and disposal of wastes
    - 13.5.6.3 Protection of adjacent lands and vegetation
    - 13.5.6.4 Control of water pollution
    - 13.5.6.5 Acid sulphate and contaminated soils
    - 13.5.6.6 Control of noise and atmospheric pollution
- 13.6 AFFECTED PARTY NOTIFICATIONS
- 13.7 ALTERATION OF EXISTING SERVICES
- 13.8 SURVEY MARKS
- 13.9 CONSTRUCTION TOLERANCES
- 13.10 LATENT CONDITIONS

### 14 PRODUCTS AND MATERIALS

- 14.1 AUTHORISED PRODUCTS AND MATERIALS
- 14.2 REJECTED PRODUCTS AND MATERIALS
- 14.3 TRANSPORTATION, HANDLING AND STORAGE OF PRODUCTS AND MATERIALS
  - 14.3.1 General
  - 14.3.2 Plastics-lined concrete products
- 14.4 DELIVERY INSPECTION OF PRODUCTS AND MATERIALS
- 14.5 CONCRETE WORKS

- 14.5.1 Delivery
- 14.5.2 Transportation of concrete
- 14.5.3 Formwork
  - 14.5.3.1 General
  - 14.5.3.2 Formwork for plastics-lined concrete
- 14.5.4 Reinforcement
- 14.5.5 Placement
  - 14.5.5.1 General
  - 14.5.5.2 Placement in water
- 14.5.6 Slump
- 14.5.7 Compaction
- 14.5.8 Stripping
- 14.5.9 Curing
- 14.5.10 Repair of blemishes
- 14.6 SUPPLY OF WATER TO THE WORKS
- 14.7 ON-SITE STOCKPILES

## **15 EXCAVATION**

- 15.1 SAFETY
- 15.2 LIMITS OF EXCAVATION
- 15.3 EXCAVATION ACROSS IMPROVED SURFACES
- 15.4 EXCAVATION IN ROOT ZONES
- 15.5 BLASTING
- 15.6 SUPPORT OF EXCAVATIONS
- 15.7 DRAINAGE AND DEWATERING
- 15.8 FOUNDATIONS AND FOUNDATION STABILISATION
- 15.9 SURPLUS EXCAVATED MATERIAL

## **16 BEDDING FOR PIPES AND MAINTENANCE STRUCTURES**

- 16.1 TRENCH FLOOR PREPARATION
- 16.2 BEDDING MATERIALS
- 16.3 PLACEMENT OF BEDDING
- 16.4 SPECIAL PIPE SUPPORT FOR NON-SUPPORTIVE SOILS
- 16.5 BEDDING FOR MAINTENANCE SHAFTS AND BENDS
- 16.6 BEDDING FOR MAINTENANCE HOLES

## **17 PIPE LAYING AND JOINTING**

- 17.1 INSTALLATION OF PIPES
  - 17.1.1 General
  - 17.1.2 Cleaning, inspection and joint preparation
  - 17.1.3 Polyethylene
  - 17.1.4 Laying
- 17.2 HORIZONTAL AND VERTICAL DEFLECTION OF SEWERS
  - 17.2.1 General
  - 17.2.2 Methods of deflection
  - 17.2.3 Horizontal curves
  - 17.2.4 Vertical curves
  - 17.2.5 Compound curves
- 17.3 HORIZONTAL AND VERTICAL SEPARATION OF CROSSING PIPELINES
- 17.4 FLOTATION CONTROL
- 17.5 TRENCH STOPS
- 17.6 BULKHEADS
- 17.7 PROPERTY CONNECTION SEWERS
- 17.8 DEAD ENDS
- 17.9 MARKING OF PROPERTY CONNECTION SEWERS AND DEAD ENDS
- 17.10 CORROSION PROTECTION OF CAST IRON
- 17.11 MARKING TAPES
  - 17.11.1 Non-detectable marking tape
  - 17.11.2 Detectable marking tape



- 17.12 BORED PIPES UNDER ROADS, DRIVEWAYS AND ELSEWHERE
- 17.13 AQUEDUCTS
- 17.14 BRIDGE CROSSINGS
- 17.15 PLASTICS-LINED RC PIPE JOINTING
  - 17.15.1 General
  - 17.15.2 Plastics lining work protection
  - 17.15.3 Field jointing
  - 17.15.4 Plastics lining ancillary work
    - 17.15.4.1 Alignment of lining keys
    - 17.15.4.2 Provision of seepage channels
    - 17.15.4.3 Use of jointing accessories and adhesives
- 17.16 WELDING OF STEEL PIPELINES
  - 17.16.1 General
  - 17.16.2 Field welding of flanges

## **18 MAINTENANCE HOLES (MHS)**

- 18.1 GENERAL
- 18.2 MH BASE
- 18.3 TRENCH DRAINAGE AROUND MHS
- 18.4 PRECAST CONCRETE MH SYSTEMS
- 18.5 CAST IN-SITU CONCRETE MH
- 18.6 BENCHING AND CHANNELS
- 18.7 CONCRETING FOR PLASTICS-LINED WORK
  - 18.7.1 Concrete work planning
  - 18.7.2 Fixing of plastics lining for concrete work
  - 18.7.3 Concrete placement and formwork removal
- 18.8 INTERNAL COATING OF CONCRETE MHS
- 18.9 COVERS
- 18.10 CONNECTIONS TO MHS
- 18.11 MH DROPS

## **19 MAINTENANCE SHAFTS (MS AND TMS) AND INSPECTION OPENINGS (IO)**

- 19.1 GENERAL
- 19.2 SEALING CAPS
- 19.3 COVERS
- 19.4 CONNECTIONS TO MSS AND TMSS

## **20 PIPE EMBEDMENT AND SUPPORT**

- 20.1 GENERAL
- 20.2 EMBEDMENT MATERIALS
- 20.3 COMPACTION OF EMBEDMENT
  - 20.3.1 Methods
  - 20.3.2 Compaction trials / Pre-qualification of embedment compaction method
    - 20.3.2.1 General
    - 20.3.2.2 Test method
    - 20.3.2.3 Interpretation and applicability
  - 20.3.3 Compaction control
- 20.4 SPECIAL BEDDING AND EMBEDMENTS / GEOTEXTILE SURROUND AND PILLOW
- 20.5 REMOVAL OF TRENCH SUPPORTS
- 20.6 CONCRETE EMBEDMENT AND ENCASEMENT

## **21 FILL**

- 21.1 TRENCH FILL
  - 21.1.1 General
  - 21.1.2 Material requirements
  - 21.1.3 Compaction of trench fill
- 21.2 EMBANKMENT FILL
- 21.3 DRIVES AND TUNNEL FILL

## **22 ACCEPTANCE TESTING**

### 22.1 GENERAL

### 22.2 VISUAL INSPECTION—ABOVE-GROUND

### 22.3 COMPACTION TESTING

#### 22.3.1 General

#### 22.3.2 Minimum compaction

#### 22.3.3 Embedment compaction testing

##### 22.3.3.1 Applicable pipe sizes

##### 22.3.3.2 Frequency and location of embedment tests

##### 22.3.3.3 Retesting

#### 22.3.4 Trench fill compaction testing

##### 22.3.4.1 Trafficable Test Zone

##### 22.3.4.2 Non-trafficable test zone

##### 22.3.4.3 Test method

##### 22.3.4.4 Frequency and location of tests

##### 22.3.4.5 Retesting

#### 22.3.5 Other fill compaction testing

##### 22.3.5.1 General

##### 22.3.5.2 Trafficable test zone

##### 22.3.5.3 Non-trafficable test zone

##### 22.3.5.4 Frequency and location of tests

##### 22.3.5.5 Retesting

### 22.4 AIR PRESSURE AND VACUUM TESTING OF SEWERS

#### 22.4.1 General

#### 22.4.2 Air testing methods for sewers

##### 22.4.2.1 Vacuum testing

##### 22.4.2.2 Low pressure air testing

#### 22.4.3 Testing of sewers >DN 1500

##### 22.4.3.1 General

##### 22.4.3.2 Method of test

#### 22.4.4 Testing of concrete MHs

##### 22.4.4.1 General

##### 22.4.4.2 Test method

### 22.5 INFILTRATION TESTING

### 22.6 DEFLECTION (OVALITY) TESTING OF FLEXIBLE SEWERS

#### 22.6.1 General

#### 22.6.2 Ovality proving tools

#### 22.6.3 Flexible sewers ≤DN 300

#### 22.6.4 Flexible sewers >DN 300

##### 22.6.4.1 General

##### 22.6.4.2 Flexible sewers >DN 300 and <DN 750

##### 22.6.4.3 Flexible sewers ≥DN 750

### 22.7 CCTV INSPECTION

### 22.8 INSPECTION AND TESTING OF PLASTIC LINED CONCRETE SEWERS AND MHS

#### 22.8.1 Visual inspection

#### 22.8.2 Spark testing

#### 22.8.3 Locking key pull-out tests

### 22.9 PRESSURE TESTING OF INVERTED SYPHONS

#### 22.9.1 General

#### 22.9.2 System test pressure

#### 22.9.3 Maximum allowable loss

#### 22.9.4 Test procedure

#### 22.9.5 Satisfactory pressure test

#### 22.9.6 Failure of test

**23 TOLERANCES ON AS-CONSTRUCTED WORK**

## 23.1 HORIZONTAL TOLERANCES

23.1.1 Sewers and on-line structures (e.g. MHs, MSs, TMSs, vents)

23.1.2 Property connection sewers

## 23.2 VERTICAL TOLERANCES

23.2.1 Sewers and structures

23.2.2 Property connection risers and inspection openings

23.2.3 Grade

23.2.4 Verticality (“plumb”)

## 23.3 TOLERANCES ON FINISHED SURFACE STRUCTURES AND FITTINGS

## 23.4 CAST IN-SITU CONCRETE STRUCTURES AND SLABS

**24 CONNECTION TO EXISTING SEWERS****25 RESTORATION**

25.1 GENERAL

25.2 PAVEMENTS

25.3 LAWNS

25.4 GRASSED AREAS

25.5 BUSHLAND

25.6 PROVISION FOR SETTLEMENT

25.7 MAINTENANCE OF RESTORED SURFACES

**26 WORK AS CONSTRUCTED DETAILS****APPENDIX G OVALITY TESTING OF PVC AND GRP GRAVITY SEWERS DEFAULT PROVER DIAMETERS**

G1 GENERAL

G2 DEFAULT PROVER DIAMETERS

**TABLES**

TABLE 17.1 METHODS OF ACHIEVING CURVED SEWERS

TABLE 20.1 MAXIMUM PARTICLE SIZE

TABLE 22.1 EMBEDMENT OF FLEXIBLE PIPES MINIMUM COMPACTION

TABLE 22.2 EMBEDMENT OF RIGID PIPES MINIMUM COMPACTION

TABLE 22.3 TRENCH / EMBANKMENT FILL OF RIGID AND FLEXIBLE PIPES AND MAINTENANCE STRUCTURES – MINIMUM COMPACTION

TABLE 22.4 PRESSURE AND VACUUM AIR TESTING ACCEPTANCE TIMES FOR 7 KPA PRESSURE CHANGE

TABLE 22.5 CONCRETE MH TESTING FREQUENCY

TABLE 22.6 MINIMUM TEST TIMES FOR CONCRETE MHs

TABLE 22.7 MAXIMUM ALLOWABLE SHORT-TERM PIPE DEFLECTIONS

TABLE 23.1 SEWER GRADE TOLERANCES

TABLE 23.2 PROPERTY CONNECTION SEWER GRADE TOLERANCES

TABLE G1 PROVER OUTSIDE DIAMETER FOR PVC AND GRP PIPES



WATER SERVICES ASSOCIATION  
*of Australia*

# **Sewerage Code of Australia**

## **Part 4: Standard Drawings**

**Second Edition**

**Version 2.3**

## CONTENTS

### 27 INTRODUCTION

- 27.1 GENERAL
- 27.2 DRAWING COMMENTARY

### 28 LISTING OF STANDARD DRAWINGS

### 29 COMMENTARY ON SEW-1100 SERIES – PIPELINE LAYOUT

- 29.1 GENERAL
- 29.2 SEW-1100 TO SEW-1102 – DESIGN LAYOUTS
  - 29.2.1 SEW-1100 – Locality and site plan
  - 29.2.2 SEW-1101 – Longitudinal sections
  - 29.2.3 SEW-1102 – Schedule of Works
- 29.3 SEW-1103 – TYPICAL ARRANGEMENTS
- 29.4 SEW-1104 AND SEW-1105 – PROPERTY CONNECTION DETAILS
- 29.5 SEW-1106 AND SEW-1107 – PROPERTY CONNECTION DETAILS – METHODS
  - 29.5.1 SEW-1106 – IO interface method
  - 29.5.2 SEW-1107 – Buried interface method
- 29.6 SEW-1108 – PROPERTY CONNECTION DETAILS – Y BRANCH AND AROUND OBSTRUCTIONS
- 29.7 SEW-1109 – PROPERTY CONNECTION DETAILS – PRIVATE PROPERTY & MARKING SYSTEMS

### 30 COMMENTARY ON SEW-1200 SERIES – EMBEDMENT AND TRENCH FILL

- 30.1 GENERAL
- 30.2 MAXIMUM DEPTH TO INVERT FOR STANDARD SUPPORT TYPES
- 30.3 SEW-1200 – SOIL CLASSIFICATION GUIDELINES
- 30.4 SEW-1201 – EMBEDMENT AND TRENCHFILL – TYPICAL ARRANGEMENTS
- 30.5 SEW-1202 – STANDARD EMBEDMENT FLEXIBLE AND RIGID PIPES
- 30.6 SEW-1203 – SPECIAL EMBEDMENT INADEQUATE FOUNDATIONS
- 30.7 SEW-1204 – SPECIAL EMBEDMENT SUPPORT USING PILES
- 30.8 SEW-1205 – SPECIAL EMBEDMENT CONCRETE AND STABILISED SUPPORTS
- 30.9 SEW-1206 – BULKHEADS AND TRENCHSTOP
- 30.10 SEW-1207 – TRENCH DRAINAGE TYPICAL SYSTEMS
- 30.11 SEW-1208 – VERTICALS AND NEAR VERTICALS EXPOSED AND CONCEALED METHODS

### 31 COMMENTARY ON SEW-1300 SERIES – MAINTENANCE STRUCTURES

- 31.1 GENERAL
- 31.2 SEW-1300 – SEWERS  $\leq$ DN 300 PRECAST MH TYPES P1 AND P2
- 31.3 SEW-1301 – CAST IN-SITU MH TYPES C1 AND C2
- 31.4 SEW-1302 – MH PIPE CONNECTION DETAILS
- 31.5 SEW-1303 – SEWERS  $\leq$ DN 300 MH CHANGE IN LEVEL ARRANGEMENTS
- 31.6 SEW-1304 AND SEW-1305 – MH CHANNEL ARRANGEMENTS AND DETAILS
- 31.7 SEW-1306 – ALTERNATIVE MH DROP CONNECTIONS
- 31.8 SEW-1307 – STEP IRONS AND LADDERS
- 31.9 SEW-1308 – TYPICAL MH COVER ARRANGEMENTS
- 31.10 SEW-1309 TO SEW-1312 INCLUSIVE – SPECIAL MHS
  - 31.10.1 SEW-1309 – Sewers DN 375 to DN 750 MHS
  - 31.10.2 SEW-1310 – Special MHS using permanent formwork
- 31.11 SEW-1311 AND SEW-1312 – DEEP MHS
- 31.12 SEW-1313 TO SEW-1316 INCLUSIVE – MAINTENANCE SHAFTS
- 31.13 SEW-1317 – MH CONNECTION DETAILS PE PIPE

**32 COMMENTARY ON SEW-1400 SERIES – SPECIAL CROSSINGS / STRUCTURES ARRANGEMENTS**

- 32.1 GENERAL
- 32.2 SEW-1400 – SYPHON ARRANGEMENT
- 32.3 SEW-1401 TO SEW-1403 INCLUSIVE – BURIED CROSSINGS
- 32.4 SEW-1404 TO SEW-1406 INCLUSIVE – AERIAL CROSSINGS
- 32.5 SEW-1407 AND SEW-1408 – VENTILATION SYSTEMS
- 32.6 SEW-1409 TO SEW-1411 INCLUSIVE – WATER SEAL ARRANGEMENTS
- 32.7 SEW-1412 – EMERGENCY RELIEF STRUCTURES

**33 COMMENTARY ON SEW-1500 SERIES – INSERTIONS AND REPAIR SYSTEMS**

- 33.1 GENERAL
- 33.2 SEW-1500 – CUT-IN METHODS
- 33.3 SEW-1501 – INSERTION OF JUNCTIONS
- 33.4 SEW-1502 – CONSTRUCTION OF MHS AND MSS OVER EXISTING SEWERS

**STANDARD DRAWINGS**

**TABLES**

- TABLE 29.1 MINIMUM RETICULATION AND PROPERTY CONNECTION SEWER SIZES
- TABLE 29.2 EQUIVALENT STIFFNESS CLASSES FOR PVC SEWERS
- TABLE 30.1 MAXIMUM DEPTH TO INVERT FOR PVC SEWERS
- TABLE 30.2 MAXIMUM DEPTH TO INVERT FOR GRP SEWERS
- TABLE 30.3 MAXIMUM DEPTH TO INVERT FOR VC SEWERS
- TABLE 30.4 MAXIMUM DEPTH TO INVERT FOR RC SEWERS
- TABLE 30.5 MAXIMUM PARTICLE SIZE

**28 LISTING OF STANDARD DRAWINGS**

<b>DRAWING NUMBER</b>	<b>ACTIVITY</b>	<b>TITLE</b>	<b>Equivalent 1999 DRAWING NUMBER</b>
<b>PIPELINE LAYOUT</b>			
SEW-1100	Design Layouts	Typical Locality & Site Plan	new
SEW-1101	Design Layouts	Longitudinal Sections	new
SEW-1102	Design Layouts	Connection to Existing Sewer Schedule of Works	new
SEW-1103	Pipelaying	Typical Arrangements	new
SEW-1104	Property Connection Details	Sewer in Road Reserve	SEW-300
SEW-1105	Property Connection Details	Sewer in Easements & Inside Property	SEW-301
SEW-1106	Property Connection Details	IO Interface Method	SEW-302
SEW-1107	Property Connection Details	Buried Interface Method	
SEW-1108	Property Connection Details	“Y” Branch & Around Obstructions	SEW-303
SEW-1109	Property Connection Details	Private Property & Marking Systems	SEW-304
<b>EMBEDMENT / TRENCHFILL AND SUPPORT SYSTEMS</b>			
SEW-1200	Soil Classification Guidelines And	Allowable Bearing Pressures for Bulkheads	WAT-400
SEW-1201	Embedment and Trenchfill	Typical Arrangements	SEW-100
SEW-1202	Standard Embedment	Flexible & Rigid Pipes	SEW-101 SEW-102
SEW-1203	Special Embedment	Inadequate Foundations Requiring Over Excavation & Replacement	
SEW-1204	Special Embedment	Support Utilising Piles	
SEW-1205	Special Embedment	Concrete & Stabilised Supports	
SEW-1206	Trench Drainage	Bulkheads & Trenchstop	SEW-103
SEW-1207	Trench Drainage	Typical Systems	SEW-104
SEW-1208	Verticals & Near Verticals	Exposed & Concealed Methods	SEW-211
<b>ACCESS STRUCTURES</b>			
SEW-1300	Maintenance Holes	Sewers ≤ DN 300 Precast Types P1 & P2	SEW-201
SEW-1301	Maintenance Holes	Sewers ≤ DN 300 Cast Insitu Types C1 & C2	SEW-202
SEW-1302	Maintenance Holes	Pipe Connection Details	new
SEW-1303	Maintenance Holes	Sewers ≤ DN 300 Changes in Level Details	SEW-203
SEW-1304	Maintenance Holes	For Sewers ≤ DN 300 Typical Channel Arrangements	SEW-204
SEW-1305	Maintenance Holes	Typical Channel Details	SEW-205

DRAWING NUMBER	ACTIVITY	TITLE	Equivalent 1999 DRAWING NUMBER
<b>ACCESS STRUCTURES</b> <i>continued</i>			
SEW-1306	Maintenance Holes	Alternative Drop Connections	SEW-206
SEW-1307	Maintenance Holes	Step Irons & Ladders	SEW-208
SEW-1308	Maintenance Holes	Typical MH Cover Arrangements	SEW-207
SEW-1309	Maintenance Holes	Sewers DN 375 to DN 750	new
SEW-1310	Maintenance Holes	Permanent Formwork $\geq$ DN 375	new
SEW-1311	Maintenance Holes	Depth to Invert 6 m to 15 m	new
SEW-1312	Maintenance Holes	Depth to Invert > 15 m	new
SEW-1313	Maintenance Holes	MH Connection Details DN 110 to DN 450 PE Pipe	new
SEW-1314	Maintenance Shafts	Typical Installation	SEW-209
SEW-1315	Maintenance Shafts	MS & Variable Bend Installations	new
SEW-1316	Maintenance Shafts	TMS and Connection Installations	SEW-210
SEW-1317	Maintenance Holes	Typical MS Cover Arrangements	SEW-212
<b>SPECIAL CROSSINGS / STRUCTURES ARRANGEMENTS</b>			
SEW-1400	Buried Crossings	Syphon Arrangement	SEW-105
SEW-1401	Buried Crossings	Railways	new
SEW-1402	Buried Crossings	Major Roadways	new
SEW-1403	Buried Crossings	Bored & Jacked Encasing Pipe Details	new
SEW-1404	Aerial Crossings	Aqueduct	SEW-106
SEW-1405	Aerial Crossings	Aqueduct Protection Grille	SEW-107
SEW-1406	Aerial Crossings	Bridge Crossing Concepts	new
SEW-1407	Ventilation Systems	Induct Vent	SEW-213
SEW-1408	Ventilation Systems	Educt Vent	SEW-213
SEW-1409	Water Seal Arrangements	Mains Type	SEW-214
SEW-1410	Water Seal Arrangements	Maintenance Hole System	new
SEW-1411	Water Seal Arrangements	Twin Maintenance Hole System	new
SEW-1412	Emergency Relief Structures	Typical Arrangement DN 150 to DN 375	new
<b>CONNECTIONS TO EXISTING SYSTEMS</b>			
SEW-1500	Insertions & Repair Systems	Cut-in Methods	new
SEW-1501	Insertions & Repair Systems	Insertion of Junctions	new
SEW-1502	Insertions & Repair Systems	Maintenance Structures	new