




WATER SERVICES ASSOCIATION
OF AUSTRALIA

Water Supply Code of Australia

Sydney Water Edition – 2014

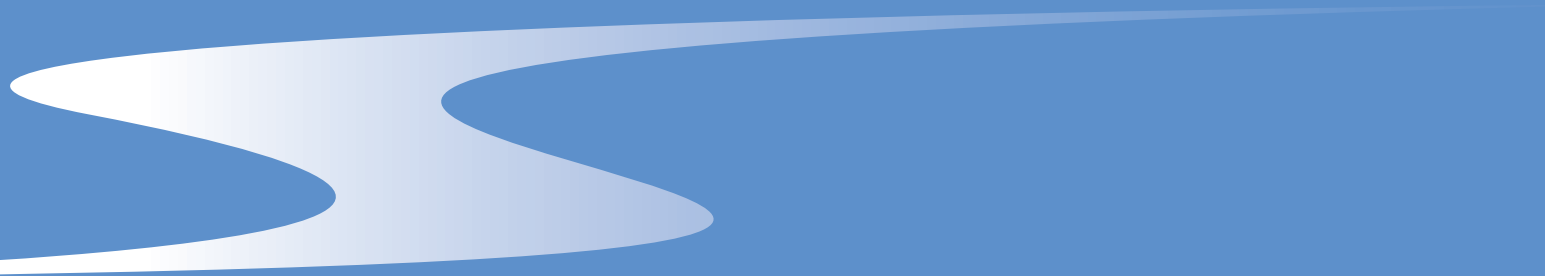

Sydney
WATER

WSA 03–2011–3.1

CONTENTS

PREFACE	7
INTRODUCTION	10
PART 0: GLOSSARY OF TERMS AND ABBREVIATIONS	
I Glossary of Terms	17
II Abbreviations	31
III Referenced Documents	35
PART 1: PLANNING AND DESIGN	
Contents	40
1 General	52
2 Water System Planning Guideline	59
3 Hydraulic Design	60
4 Products and Materials	70
5 General Design	81
6 System Pressure Management	115
7 Structural Design	139
8 Appurtenances	170
9 Design Review and Drawings	211
PART 2: CONSTRUCTION	
Contents	216
10 General	221
11 General Construction	223
12 Products and Materials	233
13 Excavation	238
14 Bedding for Pipes	244
15 Pipe Laying, Jointing and Connecting	245
16 Pipe Embedment and Support	259
17 Fill	262
18 Swabbing	265
19 Acceptance Testing	267
20 Disinfection	275
21 Tolerances on As-Constructed Work	277
22 Connections to Existing Water Mains	279
23 Restoration	283
24 Work As Constructed Details	285

PART 3: STANDARD DRAWINGS

Contents	288
SW 25 Introduction	290
SW 26 Listing of Standard Drawings	292
SW 27 Commentary on WAT-1100 Series	295
SW 28 Commentary on WAT-1200 Series	298
SW 29 Commentary on WAT-1300 Series	303
SW 30 Commentary on WAT-1400 Series	306
SW 31 Commentary on WAT-1800 Series	308



**WATER SERVICES ASSOCIATION
OF AUSTRALIA**

Water Supply Code of Australia

WSA 03—2011-3.1

Sydney Water Edition

2014

Part 1: Planning and Design

CONTENTS

1 GENERAL

- 1.1 SCOPE
- 1.2 PLANNING AND DESIGN
 - 1.2.1 Objectives
 - 1.2.2 Scope and requirements
 - 1.2.3 Concept plan format
 - 1.2.4 Critical infrastructure protection
 - 1.2.4.1 Asset categorisation
 - 1.2.4.2 All hazards – Infrastructure protection
 - 1.2.5 Detailed design
 - 1.2.5.1 Designer's needs and responsibilities
 - 1.2.5.2 Requirements to be addressed
 - 1.2.5.3 Design outputs
 - 1.2.6 Design life
 - 1.2.7 Instrumentation and control systems
- 1.3 CONSULTATION WITH OTHER PARTIES

2 WATER SYSTEM PLANNING GUIDELINE

3 HYDRAULIC DESIGN

- 3.1 SIZING
 - 3.1.1 General
 - 3.1.2 Minimum pipe sizes
 - 3.1.3 Empirical sizing of reticulation mains
 - 3.1.4 Dual water supply systems
 - 3.1.5 Fire flows
 - 3.1.6 Sizing by analysis
 - 3.1.6.1 General
 - 3.1.6.2 Head losses
 - 3.1.6.3 Hydraulic roughness values
 - 3.1.6.4 Flow velocities
- 3.2 DESIGN PRESSURES
 - 3.2.1 General
 - 3.2.2 Gravity systems
 - 3.2.3 Systems subjected to dynamic pressures
- 3.3 PRESSURE CLASS OF SYSTEM COMPONENTS
 - 3.3.1 Gravity systems
 - 3.3.2 Systems subjected to dynamic pressures
 - SW 3.3.3 Minimum pressure class
- 3.4 THRUST AND ANCHOR BLOCK DESIGN
- 3.5 SYSTEM TEST PRESSURE
- 3.6 DESIGN FOR DYNAMIC STRESSES
 - 3.6.1 General
 - 3.6.2 Surge
 - 3.6.3 Fatigue
 - 3.6.4 Fatigue de-rating of plastics pipes and fittings
- 3.7 TEMPERATURE DE-RATING OF PLASTICS PIPES AND FITTINGS
- 3.8 PIPELINE COMPONENTS MINIMUM PRESSURE CLASS

4 PRODUCTS AND MATERIALS

4.1 GENERAL

4.2 DIFFERENTIATION OF DRINKING AND NON-DRINKING PIPE SYSTEMS

- 4.2.1 Principles
- 4.2.2 Water supply mains – drinking water
- 4.2.3 Water supply mains – non-drinking water
- 4.2.4 Property services – drinking water
- 4.2.5 Property services – non-drinking water
- 4.2.6 Marking tapes

4.3 DUCTILE IRON PIPELINE SYSTEMS

- 4.3.1 Not used
- 4.3.2 Sizes and configurations
- 4.3.3 Seal coating of lining
- 4.3.4 Sleeving
- 4.3.5 Screw-on flanges for DI pipes
- 4.3.6 Flanged joints

4.4 PVC PIPELINE SYSTEMS

4.5 PE PIPELINE SYSTEMS

4.6 STEEL PIPELINE SYSTEMS

- 4.6.1 Not used
- 4.6.2 Sizes and configurations
- 4.6.3 Joints
- 4.6.4 Field welding
- 4.6.5 Flanged joints

4.7 GRP PIPELINE SYSTEMS

4.8 PROTECTION AGAINST DEGRADATION

- 4.8.1 Application
- 4.8.2 Protection against aggressive environments
- 4.8.3 Protection against damage to coatings
- 4.8.4 Stainless steels
 - 4.8.4.1 Grade selection
 - 4.8.4.2 Welding
 - 4.8.4.3 Threaded components
- 4.8.5 Cathodic protection
- 4.8.6 Stray current corrosion
- 4.8.7 Protection against contaminated ground
- 4.8.8 Bolted connections

5 GENERAL DESIGN

5.1 GENERAL REQUIREMENTS

- 5.1.1 Design tolerances
- 5.1.2 Levels
- 5.1.3 Water main renewals—electrical safety and earthing to water services
- 5.1.4 Environmental considerations
 - 5.1.4.1 General
 - 5.1.4.2 Urban salinity

5.2 RETICULATION DESIGN FOR WATER QUALITY

- 5.2.1 Layout of water mains
- 5.2.2 Looped mains
- 5.2.3 Link mains
- 5.2.4 Reduced size mains
- SW 5.2.5 Prevention of back siphonage
- SW 5.2.6 Separation of drinking and non-drinking water supply systems

SW 5.2.6.1 Permanent cross links and cross connections

SW 5.2.6.2 Temporary cross links

5.3 WATER MAIN ACCESS

5.4 LOCATION OF WATER MAINS

5.4.1 General

5.4.2 Water mains in road reserves

5.4.2.1 General

5.4.2.2 Location in footway

5.4.2.3 Location in carriageway

5.4.2.4 Location in roundabouts and bus bays

5.4.3 Location in other than dedicated public road reserves

5.4.4 Water mains in easements

5.4.5 Dual water supply systems

5.4.6 Effect on vegetation

5.4.7 Water mains near trees

5.4.8 Contaminated sites

5.4.9 Crossings

5.4.9.1 General

5.4.9.2 Requirements for encased pipe installations

5.4.10 Railway reserves

5.4.11 Crossings of creeks or drainage reserves

5.4.12 Overhead power lines and transmission towers

5.4.13 Water mains in conjunction with landscaping and/or other development

5.4.14 Water mains on curved alignments

5.4.15 Location markers

5.4.16 Marking tape

5.4.16.1 General

5.4.16.2 Mains

5.4.16.3 Property services

5.5 TRENCHLESS TECHNOLOGY FOR PIPELAYING

5.6 SHARED TRENCHING

5.7 DUPLICATE MAINS

5.8 RIDER MAINS

5.9 CONNECTION OF NEW MAINS TO EXISTING MAINS

5.10 TERMINATION POINTS

5.10.1 Permanent ends of water mains

5.10.2 Temporary ends of water mains

5.10.3 Chlorination assemblies

5.10.4 Flushing points

5.11 PROPERTY SERVICES

5.11.1 General

5.11.2 Connections to water mains

5.11.3 Services, outlets and meters

5.12 OBSTRUCTIONS AND CLEARANCES

5.12.1 General

5.12.2 Surface obstructions

5.12.3 Clearance from transmission towers

5.12.4 Clearance from structures and property boundaries

5.12.5 Underground obstructions and services

5.12.5.1 General

5.12.5.2 Clearance requirements

5.12.6 Deviation of water mains

5.12.6.1 General

5.12.6.2 Horizontal deviation of water mains

- 5.12.6.3 Vertical deviation of water mains
- 5.12.6.4 Curving of pipes to avoid obstructions

5.13 DISUSED OR REDUNDANT PIPELINES

6 SYSTEM PRESSURE MANAGEMENT

6.1 GENERAL

6.2 IN-LINE PRESSURE BOOSTER PUMPING STATIONS

- 6.2.1 Planning criteria
- 6.2.2 Concept design
 - 6.2.2.1 General
 - 6.2.2.2 Life cycle considerations
 - 6.2.2.3 Functionality
 - 6.2.2.4 Due diligence requirements
 - 6.2.2.5 Reliability
 - 6.2.2.6 Maintainability
 - 6.2.2.7 Materials design
 - 6.2.2.8 Location
 - 6.2.2.9 Site selection
 - 6.2.2.10 Noise control
 - 6.2.2.11 Services
 - 6.2.2.12 Access
 - 6.2.2.13 Site drainage
 - 6.2.2.14 Landscaping
 - 6.2.2.15 Security
 - 6.2.2.16 Signage
 - 6.2.2.17 Supporting systems
 - 6.2.2.18 Health and safety
- 6.2.3 Commissioning plan
 - 6.2.3.1 General
 - 6.2.3.2 Pre-commissioning
 - 6.2.3.3 Commissioning
- 6.2.4 System planning and modelling
 - 6.2.4.1 Modelling
 - 6.2.4.2 Minimum pressure affecting the area
 - 6.2.4.3 Number of affected properties within the low pressure zone
- 6.2.5 Booster design
 - 6.2.5.1 General
 - 6.2.5.2 Connection to the network
 - 6.2.5.3 Maximum flow and pressure requirements
 - 6.2.5.4 Design for minimum pressure boost conditions
 - 6.2.5.5 Design for minimum flow conditions
 - 6.2.5.6 Booster configuration design
 - 6.2.5.7 Booster set and pump selection
 - 6.2.5.8 Booster pipework and manifold design
 - 6.2.5.9 Booster equipment and devices
 - 6.2.5.10 Site specific requirements
- 6.2.6 Booster pipework
 - 6.2.6.1 General design parameters
 - 6.2.6.2 Manifolds, off-takes, suction and delivery pipework
 - 6.2.6.3 Pressure gauges and tapings
- 6.2.7 Pressure accumulator tank
- 6.2.8 Power system and supply
 - 6.2.8.1 General
 - 6.2.8.2 Security of supply
 - 6.2.8.3 Primary supply
 - 6.2.8.4 Duplicate supply

- 6.2.8.5 Emergency power
- 6.2.8.6 On-site generator
- 6.2.8.7 Mobile generator
- 6.2.8.8 Power factor correction
- 6.2.8.9 Lighting
- 6.2.9 Control and telemetry system
 - 6.2.9.1 General
 - 6.2.9.2 Instrumentation
 - 6.2.9.3 System requirements
 - 6.2.9.4 Fire flow operation
- 6.2.10 Alarms and controls
 - 6.2.10.1 General
 - 6.2.10.2 Control switches – manual and emergency operation
- 6.2.11 Telemetry
 - 6.2.11.1 General
 - 6.2.11.2 Software
 - 6.2.11.3 Communications
- 6.3 PRESSURE REDUCING VALVE INSTALLATIONS
 - 6.3.1 Planning criteria
 - 6.3.2 Design requirements
- 6.4 PRESSURE SUSTAINING VALVE INSTALLATIONS
 - 6.4.1 Planning criteria
 - 6.4.2 Design requirements

7 STRUCTURAL DESIGN

- 7.1 GENERAL
- 7.2 STRUCTURAL CONSIDERATIONS
- 7.3 INTERNAL FORCES
- 7.4 EXTERNAL FORCES
 - 7.4.1 General
 - 7.4.2 Pipe cover
 - 7.4.3 Embedment zone dimensions
 - 7.4.4 Pipe embedment
 - 7.4.5 Buoyancy
- 7.5 GEOTECHNICAL CONSIDERATIONS
 - 7.5.1 General
 - 7.5.2 Water mains in engineered or controlled fill
 - 7.5.3 Water mains in non-engineered fill
 - 7.5.4 Construction of an embankment
- 7.6 CONCRETE ENCASEMENT
 - 7.6.1 General
 - 7.6.2 Requirements
 - 7.6.3 Encased steel pipelines
 - 7.6.3.1 General
 - 7.6.3.2 Existing steel pipelines
- 7.7 WATER MAINS IN UNSTABLE GROUND
 - 7.7.1 General
 - 7.7.2 Mine subsidence areas
 - 7.7.3 Slip areas
- 7.8 ABOVE-GROUND WATER MAINS
- 7.9 PIPELINE ANCHORAGE
 - 7.9.1 General
 - 7.9.2 Thrust blocks

- 7.9.2.1 General
- 7.9.2.2 Concrete thrust blocks
- 7.9.2.3 Use of puddle flanges to transfer thrust
- 7.9.2.4 Timber and recycled plastics thrust blocks
- 7.9.3 Anchor blocks
- 7.9.4 Thrust and anchor blocks for dual water supply systems
- 7.9.5 Restrained elastomeric seal joint water mains
- 7.9.6 Restraint requirements for special situations
 - 7.9.6.1 Above-ground mains with unrestrained flexible joints
 - 7.9.6.2 Buried steel mains with welded joints
 - 7.9.6.3 Above-ground steel mains with welded joints
 - 7.9.6.4 Ductile iron and steel mains with flanged joints
 - 7.9.6.5 PE mains
- 7.10 BULKHEADS AND TRENCHSTOPS
- 7.11 UNFORESEEN GROUND CONDITIONS
- SW 7.12 INSTALLATION TREATMENTS FOR WATER MAINS

8 APPURTENANCES

- 8.1 VALVES—GENERAL
 - 8.1.1 Valving design
 - 8.1.2 Valve siting principles
 - 8.1.3 Selection considerations
 - 8.1.4 Local in-line booster pumping stations
 - 8.1.5 Plastics identification covers
- 8.2 STOP VALVES
 - 8.2.1 Not used
 - 8.2.2 Installation design and selection criteria
 - 8.2.2.1 General
 - 8.2.2.2 Gate valves
 - 8.2.2.3 Butterfly valves
 - 8.2.3 Stop valves for transfer/distribution mains
 - 8.2.4 Stop valves for reticulation mains
 - 8.2.5 Stop valves for local in-line booster pumping stations
 - 8.2.6 Bypass of stop valve
 - 8.2.7 Stop valves—location and arrangements
 - 8.2.7.1 General
 - 8.2.7.2 Arrangement 1
 - 8.2.7.3 Arrangement 2
 - 8.2.7.4 Arrangement 3
 - 8.2.7.5 Arrangement 4
 - 8.2.7.6 Arrangement 5
 - 8.2.7.7 Arrangement 6
 - 8.2.7.8 Arrangement 7
 - 8.2.8 Stop valve special arrangements
 - 8.2.9 Rider mains and network configurations
 - 8.2.10 Crossing mains – interconnection
- 8.3 CONTROL VALVES
 - 8.3.1 Not used
 - 8.3.2 Automatic inlet control valves (AICV)
 - 8.3.3 Pressure reducing valves (PRV)
 - 8.3.4 Pressure relief valves (PReIV)
 - 8.3.5 Pump control valves
 - 8.3.6 Pressure sustaining valves (PSV)
- 8.4 AIR VALVES (AV)
 - 8.4.1 Not used

- 8.4.2 Installation design criteria
- 8.4.3 Air valves type
- 8.4.4 Air valves size
- 8.4.5 Air valves location
- 8.4.6 Use of hydrants as an alternative to air valves
- 8.4.7 Water sampling via air valves

8.5 NON-RETURN VALVES

- 8.5.1 Not used
- 8.5.2 Installation design criteria
- 8.5.3 Typical installations of non-return valves

8.6 SCOURS AND PUMP-OUT BRANCHES

- 8.6.1 Location and arrangements
- 8.6.2 Design
- 8.6.3 Scour application
- 8.6.4 Scour size
- 8.6.5 Scour location

8.7 SWABBING POINTS

8.8 HYDRANTS

- 8.8.1 Not used
- 8.8.2 Purposes
- 8.8.3 Hydrant siting principles
- 8.8.4 Hydrant types
- 8.8.5 Hydrant installation
- 8.8.6 Hydrant outlet connections
- 8.8.7 Hydrant size
- 8.8.8 Hydrant spacing
- 8.8.9 Hydrant location
- 8.8.10 Hydrants for reticulation system operational requirements
- 8.8.11 Hydrants at ends of mains

8.9 DISINFECTION FACILITIES

- 8.9.1 General
- 8.9.2 Reticulation mains
- 8.9.3 Transfer and distribution mains
- 8.9.4 Discharge

8.10 SURFACE FITTINGS

- 8.10.1 Not used
- 8.10.2 General
- 8.10.3 Marking of surface fittings
- 8.10.4 Installation requirements

8.11 APPURTENANCE LOCATION MARKING

- 8.11.1 General
- 8.11.2 Indicator plates and other markers
- 8.11.3 Pavement markers
- 8.11.4 Kerb markings

SW 8.12 SAMPLING POINTS ON DISTRIBUTION AND TRANSFER MAINS

9 DESIGN REVIEW AND DRAWINGS

9.1 DESIGN REVIEW

9.2 DESIGN DRAWINGS

- 9.2.1 General
- 9.2.2 Composition of Design Drawings
- 9.2.3 Scale
- 9.2.4 Contents of Design Drawings

9.2.5 Pipeline system acronyms

9.2.6 Water mains >DN 300

9.3 SPECIFICATIONS

9.4 RECORDING OF WORK AS CONSTRUCTED INFORMATION

TABLES

Table 1.1	Asset Categories
Table 1.2	Typical Asset Design Lives
Table 2.1	Not used
Table 2.2	Not used
Table 2.3	Not used
Table 3.1	Minimum Pipe Sizes for Greenfield Developments
Table SW 3.5	Minimum Pipe Sizes for Infill Developments
Table 3.2	Empirical Guide for Pipe Sizing
Table SW 3.6	Minimum Pipe Sizes for Dual Supply Developments
Table SW 3.7	Test and Asset Design Pressures – Based on System Pressure
Table 3.3	Methods for Design of Plastics Pipes and Fittings for Dynamic Stresses
Table 3.4	Temperature De-Rating Factors for Plastics Pipes Operating at Elevated Temperatures
Table 4.1	Colour Differentiation of Drinking Water and Non-Drinking Water Components in Dual Water Reticulation Systems
Table 5.1	Not used
Table 5.2	Default Easement Guidelines
Table 5.3	Trench Details for Two Parallel Mains/Services
Table 5.4	Residential Property Service Pipe/Connection Sizes
Table 5.5	Clearances Between Water Mains and Underground Services
Table 6.1	Flow Velocities
Table 7.1	Not used
Table 7.2	Minimum Depths of Pipe Cover
Table 7.3	Minimum Thrust Area for Concrete Blocks at 1000 kPa System Test Pressure
Table 7.4	Not used
Table 7.5	Requirements for Bulkheads and Trenchstops
Table SW 7.6	Minimum Installation Treatments for Water Mains
Table 8.1	Colour Coding of Spindle Cap Plastics Covers
Table 8.2	Stop Valve Spacing Criteria
Table 8.3	Maximum Water Main Drainage Times
Table 8.4	Minimum Scour Size

FIGURES

Figure 1.1	Typical Water Supply System
Figure 2.1(a)	Not used
Figure 2.1(b)	Not used

Figure 2.1(c)	Not used
Figure 2.2	Not used
Figure 4.1	Flange Fastener Tightening Sequence
Figure 4.2	Typical Insulated Flanged Joint for Cathodically Protected Steel Mains
Figure 4.3	Typical Bolted Connection Detail for Fusion Bonded Coated Ductile Iron Flanges With Stainless Steel Fasteners
Figure 4.4	Typical Bolted Connection Detail and Corrosion Protection Procedure for Buried Ductile Iron Flanges With Galvanised Steel Fasteners
Figure 4.5	Typical Bolted Connection Detail for PE Stub Flange and Raised Ductile Iron Flange With Stainless Steel Fasteners and Backing Plate
Figure 5.1	Looped and Link Mains
Figure 5.2	Not used
Figure 5.3	Typical Dual Water Installation in Common Trench
Figure SW 5.4	Typical Combined Trench Installation
Figure SW 5.5	Typical Combined Trench Installation Off-take
Figure 5.6	Typical Under Pressure Cut-In Connection Method Using a Split SS Clamp With Flanged Off-take – Plan View
Figure 5.7	Typical Inserted Tee Method Using Mechanical Couplings – Plan View
Figure 5.8	Typical Flushing Assembly Details for Ends of Reduced Sized Mains
Figure 5.9	Not used
Figure 5.10	Not used
Figure 5.11	Not used
Figure 5.12	Horizontal Deviation by Deflection at Pipe Joints – Plan View
Figure 5.13	Horizontal Deflection Using a DI SOC-SOC Connector and Permitted Joint Deflections for DI Pipes and Other Applicable Pipe Types – Plan View
Figure 5.14	Deflection Using DI Bends with DI and Other Permitted Pipe Types – Plan View
Figure SW 5.15	Vertical Deviation by Deflection at Pipe Joints – Section View
Figure 5.16	Vertical Deviation Using DI Bends – Section View
Figure 5.17	Typical Anchor Block Detail for Vertical Bends
Figure SW 5.18	Vertical Deflections Using Fabricated Pipe and Flanges – Section View
Figure SW 5.19	Vertical Deflections Using Double Offset Fabricated Pipe and Flanges – Section View
Figure 6.1	Typical Pre-Commissioning and Commissioning Process
Figure 6.2	Typical Handover to Water Agency
Figure 7.1	Typical Arrangement of Buried Pipe
Figure 7.2	Type A Embedment Support

Figure 7.3	Type B Embedment Support
Figure 7.4	Type C and D Embedment Support
Figure 7.5	Type E Embedment Support
Figure 7.6	Type F Embedment Support
Figure 7.7	Type G Embedment Support
Figure 7.8	Type H Embedment Support
Figure 7.9	Type J and K Concrete Encasement Embedment Support
Figure 7.10	Alternative End Treatment for Concrete Encased Steel Pipelines
Figure 7.11	Thrust Block for Tees (for Horizontal Thrust)
Figure 7.12	Thrust Block for Bends (for Horizontal Thrust)
Figure 7.13	Taper Thrust Block (for Horizontal Thrust)
Figure 7.14	Flushing/Washout Bend Thrust Block (for Horizontal Thrust) (Minimum Required Thrust Area as Per Dead-End)
Figure SW 7.15	Typical Concrete Thrust Block for Flanged Valves
Figure 7.16	Typical Concrete Thrust Block for Socketed Valves
Figure 7.17	Not used
Figure 7.18	Typical Valve Restraint Mechanism
Figure 7.19	Typical Concrete Thrust Blocks for Adjacent Dual Water Mains
Figure 7.20	Typical Concrete Bulkhead Detail
Figure 7.21	Typical Road Crossing Bulkhead
Figure 7.22	Typical Trench Stop Detail
Figure 7.23	Typical Trench Drainage Detail at Bulkhead
Figure 7.24	Typical Trench Drainage Detail at Low Point in Trench
Figure 7.25	Typical Trench Drainage Detail at Concrete Encased Sections
Figure 7.26	Typical Trench Drainage Discharge
Figure 8.1	Plastics Identification Cover
Figure 8.2	Typical Gate Valve and Hydrant Installation at Standard Depth
Figure 8.3	Typical Gate Valve Installation at Deeper Than Standard Depth
Figure 8.4	Typical Valve Chamber Arrangement for DN 500 and DN 600 Mains – Plan View
Figure 8.5	Typical Valve Chamber Arrangement for a DN 750 Main – Plan View
Figure 8.6	Typical Valve Chamber Arrangement – Cross Section
Figure 8.7	Not used
Figure 8.8	Branch Valve Adjacent to Main
Figure 8.9	Branch Valve Adjacent to Inner Splay Corner
Figure 8.10	Valve and Hydrant Combinations
Figure 8.11	Valve Adjacent to a Taper
Figure 8.12	Valves in Main Cross-Links
Figure 8.13	Valves in Conjunction With Control Valves
Figure 8.14	Two Direction Supply
Figure 8.15	Off-take Arrangement for Rider Mains

- Figure 8.16 Interconnection of DN 200 and DN 225 Crossing Mains
- Figure 8.17 Interconnection of Reticulation and Distribution Mains
- Figure 8.18 Interconnection of Distribution Mains
- Figure 8.19 Interconnection of a Continuing Reticulation Main and Larger Main
- Figure 8.20 Typical Pressure Reducing Valve Installation – Sectional Elevation
- Figure 8.21 Alternative Above-Ground Installation – PRV on Bypass – Side Elevation
- Figure 8.22 PRV on Main Line With Bypass – Plan View
- Figure 8.23 Typical Air Valve Orientation
- Figure 8.24 Typical Air Valve Installation
- Figure 8.25 Scour Detail
- Figure 8.26 Scour Discharge to Approved Drainage System
- Figure 8.27 Scour Discharge Collection/Pump-Out Sump
- Figure 8.28 Scour Discharge to Storage Lagoon
- Figure 8.29 Spring Hydrant – Typical Direct Connection
- Figure 8.30 Isolating Valve Assembly With Spring Hydrant
- Figure 8.31 Typical Hydrant Installation in Non-Trafficable Location
- Figure 8.32 Typical Hydrant Installation in Trafficable Asphaltic Concrete Pavement
- Figure 8.33 Typical Hydrant With Isolating Valve Installation With Spring Hydrant Option in Non-Trafficable Location
- Figure 8.34 Typical Offsetting of Hydrants in Footway
- Figure 8.35 Non-Trafficable Stop Valve Surface Box
- Figure 8.36 Typical Trafficable Stop Valve Surface Boxes
- Figure 8.37 Typical Trafficable Hydrant Surface Boxes
- Figure 8.38 Retro-Reflective Pavement Markers
- Figure 8.39 Kerb Markings



**WATER SERVICES ASSOCIATION
OF AUSTRALIA**

Water Supply Code of Australia

WSA 03—2011-3.1

Sydney Water Edition

2014

Part 2: Construction

CONTENTS

10 GENERAL

- 10.1 SCOPE
- 10.2 INTERPRETATION

11 GENERAL CONSTRUCTION

- 11.1 GENERAL
- 11.2 ORDER OF CONSTRUCTION, TESTING AND COMMISSIONING
- 11.3 CONTRACT INTERFACES
- 11.4 CUSTOMER FOCUS
 - 11.4.1 General
 - 11.4.2 Resolution of complaints
- 11.5 PROTECTION OF PROPERTY AND ENVIRONMENT
 - 11.5.1 Protection of other services
 - 11.5.2 Disused / Redundant water mains
 - 11.5.3 Road reserves or other thoroughfares
 - 11.5.3.1 Road opening permits
 - 11.5.3.2 Treatment of pavements and other surfaces
 - 11.5.3.3 Cleanliness of roads, paths, accesses and drainage paths
 - 11.5.3.4 Storage of products, materials and equipment
 - 11.5.3.5 Obstruction of street drainage
 - 11.5.4 Private and public properties
 - 11.5.5 Protection of the environment and heritage areas
 - 11.5.5.1 General
 - 11.5.5.2 Collection and disposal of wastes
 - 11.5.5.3 Protection of adjacent lands and vegetation
 - 11.5.5.4 Control of water pollution
 - 11.5.5.5 Contaminated soils
 - 11.5.5.6 Fire ant areas
 - 11.5.5.7 Control of noise and atmospheric pollution
 - 11.5.5.8 Equipment and machinery use in bush fire prone areas
 - SW 11.5.5.9 Potentially unstable areas
- 11.6 OPERATION OF WATER SUPPLY NETWORK
- 11.7 ALTERATION OF EXISTING SERVICES
- 11.8 CONNECTION TO AND WORK ON EXISTING ASBESTOS WATER MAINS
- 11.9 CUT-IN CONNECTION EQUIPMENT
- 11.10 SURVEY MARKS
- 11.11 CONSTRUCTION TOLERANCES
- 11.12 LATENT CONDITIONS

12 PRODUCTS AND MATERIALS

- 12.1 AUTHORISED PRODUCTS AND MATERIALS
 - 12.1.1 General
- 12.2 DELIVERY INSPECTION OF PRODUCTS AND MATERIALS
- 12.3 TRANSPORTATION, HANDLING AND STORAGE OF PRODUCTS AND MATERIALS
 - 12.3.1 General
 - 12.3.2 Transportation
 - 12.3.3 Unloading and handling
 - 12.3.4 On-site storage
- 12.4 REJECTED PRODUCTS AND MATERIALS
- 12.5 CONCRETE WORKS
- 12.6 SUPPLY OF WATER TO THE WORKS
- 12.7 SUPPLY OF WATER TO EXISTING PROPERTIES
- 12.8 UNDER PRESSURE CUT-IN CONNECTION TO PRESSURE PIPES \geq DN 80
 - 12.8.1 Flanged off-takes
 - 12.8.2 Valves
 - 12.8.3 Flange holes

- 12.8.4 Gaskets
- 12.8.5 Bolting system
 - 12.8.5.1 General
 - 12.8.5.2 Carbon or alloy steel bolt assemblies
 - 12.8.5.3 Stainless steel bolt assemblies
- 12.8.6 Insulation sleeves
- 12.8.7 Plastics inserts for metallic pipes

13 EXCAVATION

- 13.1 PRECAUTIONS
- 13.2 LIMITS OF CLEARING AND EXCAVATION
- 13.3 PROTECTION OF TREES
 - 13.3.1 General precautions
 - 13.3.2 Protection of roots
- 13.4 BLASTING
- 13.5 SUPPORT OF EXCAVATIONS
- 13.6 DRAINAGE AND DEWATERING
- 13.7 UNDER PRESSURE CUT-IN CONNECTION TO PRESSURE PIPES \geq DN 80
 - 13.7.1 Excavation requirements
 - 13.7.2 Extent of excavation
- 13.8 EXCAVATION ACROSS IMPROVED SURFACES
- 13.9 TRENCH EXCAVATION
 - 13.9.1 General
 - 13.9.2 Construction of embankment
 - 13.9.3 Clearances for on-site works
- 13.10 REFILL OF EXCESSIVE EXCAVATION
- 13.11 FOUNDATIONS AND FOUNDATION STABILISATION
- 13.12 SURPLUS EXCAVATED MATERIAL
- 13.13 TRENCHLESS EXCAVATION

14 BEDDING FOR PIPES

- 14.1 TRENCH FLOOR PREPARATION
- 14.2 BEDDING AND PIPE SUPPORT
- 14.3 SPECIAL PIPE SUPPORT FOR NON-SUPPORTIVE SOILS

15 PIPE LAYING, JOINTING AND CONNECTING

- 15.1 INSTALLATION OF PIPES
 - 15.1.1 General
 - 15.1.2 Dual water supply areas
 - 15.1.3 Cleaning, inspection and joint preparation
 - 15.1.4 Laying
 - 15.1.5 Lift and re-lay construction
- 15.2 HORIZONTAL AND VERTICAL DEFLECTIONS OF PIPES
 - 15.2.1 General
 - 15.2.2 Deflection at a pipe joint
 - 15.2.3 Curving of pipe
- 15.3 HORIZONTAL AND VERTICAL SEPARATION OF CROSSING PIPELINES
- 15.4 VALVES, HYDRANTS AND OTHER APPURTENANCES
- 15.5 UNDER PRESSURE CUT-IN CONNECTION TO PRESSURE PIPES \geq DN 80
 - 15.5.1 Inspection of host pipe
 - 15.5.2 Inspection of valve to be installed
 - 15.5.3 Disinfection of fittings and equipment
 - 15.5.4 Installation of off-take clamp
 - 15.5.5 Installation of the valve
 - 15.5.6 Cut-in operation
 - 15.5.7 Recording and reporting
- 15.6 FLOTATION CONTROL
- 15.7 THRUST AND ANCHOR BLOCKS AND RESTRAINED JOINTS
- 15.8 TAPPING OF MAINS, PROPERTY SERVICES AND WATER METERS

- 15.9 TRENCH STOPS
- 15.10 BULKHEADS
- 15.11 CORROSION PROTECTION OF DUCTILE IRON
- 15.12 MARKING TAPES
 - 15.12.1 Non-detectable marking tape
 - 15.12.2 Detectable marking tape
 - 15.12.3 Tracer wire
- 15.13 VALVES, HYDRANTS AND SURFACE BOXES AND FITTINGS
 - 15.13.1 Installation
 - 15.13.2 Valve chambers for large diameter mains
- 15.14 SCOURS
- 15.15 BORED PIPES UNDER ROADS, DRIVEWAYS AND ELSEWHERE
- 15.16 AQUEDUCTS
- 15.17 BRIDGE CROSSINGS
- 15.18 APPURTENANCE LOCATION MARKING
- 15.19 FLANGED JOINTS
- 15.20 WELDING OF STEEL PIPELINES
 - 15.20.1 General
 - 15.20.2 Field welding of flanges
 - 15.20.3 Reinstatement of cement mortar lining
 - 15.20.4 Reinstatement of external corrosion protection at joints using a tape system
 - 15.20.4.1 Surface preparation
 - 15.20.4.2 Priming surfaces
 - 15.20.4.3 Mastic filler
 - 15.20.4.4 Tape application
 - 15.20.5 Reinstatement of external corrosion protection at joints using a heat-shrinkable sleeve system
 - 15.20.5.1 Surface preparation
 - 15.20.5.2 Preheat pipe
 - 15.20.5.3 Priming surfaces
 - 15.20.5.4 Mastic filler
 - 15.20.5.5 Heat-shrinkable sleeve preparation
 - 15.20.5.6 Heat-shrinkable sleeve application
- 15.21 WELDING OF PE PIPELINES
- SW 15.22 CONNECTION TO EXISTING STEEL MAINS

16 PIPE EMBEDMENT AND SUPPORT

- 16.1 GENERAL
- 16.2 EMBEDMENT MATERIALS
 - SW 16.2.1 General
 - SW 16.2.2 Recycled, reused and waste materials
- 16.3 COMPACTION OF EMBEDMENT
 - 16.3.1 Methods
 - SW 16.3.2 Compaction trials / Pre-qualification of embedment compaction method
 - SW 16.3.2.1 General
 - SW 16.3.2.2 Test method
 - SW 16.3.2.3 Interpretation and applicability
 - SW 16.3.3 Compaction control
- 16.4 SPECIAL BEDDING AND EMBEDMENTS / GEOTEXTILE SURROUND AND PILLOW
- 16.5 REMOVAL OF TRENCH SUPPORTS
- 16.6 CONCRETE EMBEDMENT AND ENCASEMENT

17 FILL

- 17.1 TRENCH FILL
 - 17.1.1 Material requirements
 - 17.1.1.1 Trafficable Areas
 - 17.1.1.2 Non-Trafficable Areas
 - 17.1.2 Placement
 - 17.1.3 Compaction of trench fill

- 17.2 EMBANKMENT FILL
- 17.3 DRIVES AND TUNNEL FILL

18 SWABBING

- 18.1 GENERAL
- 18.2 SWABS
- 18.3 SWABBING PROCEDURE

19 ACCEPTANCE TESTING

- 19.1 GENERAL
- 19.2 VISUAL INSPECTION
- 19.3 COMPACTION TESTING
 - 19.3.1 General
 - 19.3.2 Not used
 - 19.3.2.1 Not used
 - 19.3.2.2 Not used
 - 19.3.2.3 Not used
 - 19.3.2.4 Not used
 - 19.3.2.5 Not used
 - SW 19.3.3 Minimum compaction
 - SW 19.3.4 Embedment compaction testing
 - SW 19.3.4.1 Applicable pipe sizes
 - SW 19.3.4.2 Frequency and location of embedment tests
 - SW 19.3.4.3 Retesting
 - SW 19.3.5 Trench fill compaction testing
 - SW 19.3.5.1 Trafficable areas test zone
 - SW 19.3.5.2 Non-trafficable areas test zone
 - SW 19.3.5.3 Property services
 - SW 19.3.5.4 Frequency and location of tests
 - SW 19.3.5.5 Retesting
 - SW 19.3.6 Other fill compacting testing
 - SW 19.3.6.1 General
 - SW 19.3.6.2 Trafficable areas test zone
 - SW 19.3.6.3 Non-trafficable areas test zone
 - SW 19.3.6.4 Frequency and location of tests
 - SW 19.3.6.5 Retesting
- 19.4 HYDROSTATIC PRESSURE TESTING
 - 19.4.1 General
 - 19.4.2 Mains
 - 19.4.3 Property services
 - 19.4.4 Under pressure cut-in connections
 - SW 19.4.5 Alternative pressure test
 - SW 19.4.5.1 Application
 - SW 19.4.5.2 Pipeline extension/connection by inserted tee method
- 19.5 BLOCK TESTING DUAL WATER SUPPLY SYSTEMS FOR CONNECTIVITY
- 19.6 INSULATED JOINT RESISTANCE TEST
- 19.7 WATER QUALITY TESTING
 - 19.7.1 General
 - 19.7.2 Test procedure
 - 19.7.3 Satisfactory water quality test
 - 19.7.4 Failure of test

20 DISINFECTION

- 20.1 APPLICATION
- 20.2 FLUSHING OF DISINFECTION WATER

21 TOLERANCES ON AS-CONSTRUCTED WORK

- 21.1 GENERAL
- 21.2 HORIZONTAL TOLERANCES
 - 21.2.1 Water mains and in-line structures

- 21.2.2 Property services and meters
- 21.3 VERTICAL TOLERANCES
 - 21.3.1 Water mains, property connections and structures
 - 21.3.2 Verticality (“plumb”)
- 21.4 TOLERANCES ON FINISHED SURFACE STRUCTURES AND FITTINGS
- 21.5 CAST IN-SITU CONCRETE STRUCTURES AND SLABS

22 CONNECTIONS TO EXISTING WATER MAINS

- 22.1 GENERAL
 - SW 22.1.1 Preparation for connection to existing water mains
- 22.2 UNDER PRESSURE CONNECTIONS
- 22.3 INSERTED TEE CONNECTIONS
 - 22.3.1 Shutdown of existing water mains
 - 22.3.2 Making the connection to existing water main
 - 22.3.3 Re-charging the shutdown water main
- 22.4 CONNECTION AND/OR CHARGING THE NEW WATER MAINS
- 22.5 RECONNECTION OF PROPERTIES SUPPLIED BY TEMPORARY PRIVATE SERVICES

23 RESTORATION

- 23.1 GENERAL
- 23.2 PAVEMENTS
- 23.3 LAWNS
- 23.4 GRASSED AREAS
- 23.5 BUSHLAND
- 23.6 PROVISION FOR AND RECTIFICATION OF SETTLEMENT
- 23.7 MAINTENANCE OF RESTORED SURFACES

24 WORK AS CONSTRUCTED DETAILS

TABLES

- Table 18.1 Dimensions of Swabs and Discharge Units
- Table 19.1 Minimum Compaction of Embedment, Trench Fill and Embankments

FIGURES

- Figure 13.1 Typical Excavation Dimensions
- Figure 15.1 Ball and Socket Joint
- Figure 15.2 Slip-In Welded Joint
- Figure 15.3 Plain End Welded Collar Joint
- Figure 15.4 Plain End Butt Welded Joint



**WATER SERVICES ASSOCIATION
OF AUSTRALIA**

Water Supply Code of Australia

WSA 03—2011-3.1

Sydney Water Edition

2014

Part 3: Standard Drawings

CONTENTS

SW 25 INTRODUCTION

- SW 25.1 GENERAL
- SW 25.2 DRAWING COMMENTARY
- SW 25.3 BASE STANDARD DRAWINGS
- SW 25.4 VARIED STANDARD DRAWINGS
- SW 25.5 SUPPLEMENTARY (ADDITIONAL) STANDARD DRAWINGS
- SW 25.6 DEEMED TO COMPLY DRAWINGS

SW 26 LISTING OF STANDARD DRAWINGS

SW 27 COMMENTARY ON WAT-1100 SERIES – PIPELINE LAYOUT

- SW 27.1 GENERAL
- SW 27.2 WAT-1102-V, WAT-1103, WAT-1104-V AND WAT-1105-V – TYPICAL MAINS CONSTRUCTION
 - SW 27.2.1 WAT-1102-V – Reticulation main arrangements
 - SW 27.2.2 WAT-1103 – Distribution and transfer mains
 - SW 27.2.3 WAT-1104-V – DN 63 PE cul-de-sac arrangement
 - SW 27.2.4 WAT-1105-V – Connection to existing mains
- SW 27.3 WAT-1106-V – PROPERTY SERVICES – MAIN-TO-METER
- SW 27.4 WAT-1108-V – PROPERTY SERVICES – CONNECTION TO MAIN
- SW 27.5 WAT-1150-S – WATER MAIN SYMBOLS
- SW 27.6 WAT-1151-S AND WAT-1152-S – DESIGN LAYOUTS – UTILITY SERVICES – SPACE ALLOCATIONS IN FOOTWAYS

SW 28 COMMENTARY ON WAT-1200 SERIES – EMBEDMENT, TRENCH FILL AND RESTRAINTS

- SW 28.1 GENERAL
- SW 28.2 WAT-1200 – SOIL CLASSIFICATION GUIDELINES
- SW 28.3 WAT-1201 – EMBEDMENT AND TRENCH FILL
- SW 28.4 WAT-1202-V – STANDARD EMBEDMENT – ALL PIPE TYPES
- SW 28.5 WAT-1203 – SPECIAL EMBEDMENTS – INADEQUATE AND POOR FOUNDATION
- SW 28.6 WAT-1204-V – SPECIAL EMBEDMENTS – CONCRETE, GEOTEXTILE AND CEMENT STABILISED SYSTEMS
- SW 28.7 WAT-1205 – THRUST BLOCK DETAILS – CONCRETE BLOCKS
- SW 28.8 WAT-1207-V – THRUST AND ANCHOR BLOCKS – GATE VALVES AND VERTICAL BENDS
- SW 28.9 WAT-1208-V – RESTRAINED JOINT SYSTEM – DN 100 TO DN 375 DI MAINS
- SW 28.10 WAT-1209 – TRENCH DRAINAGE – BULKHEADS AND TRENCHSTOP
- SW 28.11 WAT-1210 – TRENCH DRAINAGE – TYPICAL SYSTEMS
- SW 28.12 WAT-1211-V, WAT-1212-V, WAT-1213-V AND WAT-1214-V – BURIED CROSSINGS
- SW 28.13 WAT-1250-S AND WAT-1251-S – STANDARD TRENCH DETAILS
- SW 28.14 WAT-1252-S – THRUST BLOCK DETAILS
- SW 28.15 WAT-1253-S AND WAT-1254-S – ANCHORAGE DETAILS – STOP VALVE INSTALLATIONS
- SW 28.16 WAT-1255-S – BURIED CROSSINGS

SW 29 COMMENTARY ON WAT-1300 SERIES – INSTALLATION PRACTICES / STRUCTURES

- SW 29.1 GENERAL

- SW 29.2 WAT-1301-V AND WAT-1302-V – TYPICAL VALVE & HYDRANT INSTALLATION
- SW 29.3 WAT-1303-V, WAT-1304-V, WAT-1305-V AND WAT-1306-V – TYPICAL SURFACE FITTING INSTALLATION
- SW 29.4 WAT-1307-V – TYPICAL APPURTENANCE (SCOUR) INSTALLATION
- SW 29.5 WAT-1308-V AND WAT-1309-V – TYPICAL APPURTENANCE (VALVE) INSTALLATION
- SW 29.6 WAT-1310, WAT-1311 AND WAT-1312 – AERIAL CROSSINGS
- SW 29.7 WAT-1313 – FLANGED JOINTS
- SW 29.8 WAT-1350-S AND WAT-1351-S – TYPICAL APPURTENANCE (VALVE) INSTALLATION
- SW 29.9 WAT-1352-S AND WAT-1353-S – MARKING SYSTEMS – INDICATOR PLATES
- SW 29.10 WAT-1354-S – POTENTIALLY UNSTABLE / LANDSLIP AREAS – MONITORING PITS

SW 30 COMMENTARY ON WAT-1400 SERIES – FABRICATION DETAILS

- SW 30.1 GENERAL
- SW 30.2 WAT-1400 – TYPICAL STEEL PIPE JOINTING – BUTT WELDING OF JOINTS
- SW 30.3 WAT-1401-V – TYPICAL STEEL PIPE JOINTING – RRJ SPIGOT BANDS
- SW 30.4 WAT-1402 – TYPICAL STEEL PIPE JOINTING – WELDED PIPE COLLARS
- SW 30.5 WAT-1403-V – TYPICAL STEEL FABRICATION – BENDS
- SW 30.6 WAT-1404 – TYPICAL STEEL FABRICATION – ACCESS OPENINGS
- SW 30.7 WAT-1405 – TYPICAL STEEL FABRICATION – DISMANTLING AND FLEXIBLE JOINTS
- SW 30.8 WAT-1406-V AND WAT-1407-V – VALVE CONNECTION & BY-PASS ARRANGEMENTS
- SW 30.9 WAT-1408-V – JOINT CORROSION PROTECTION
- SW 30.10 WAT-1409 – HYDRANT INSTALLATION FITTINGS – PE ASSEMBLIES
- SW 30.11 WAT-1450-S – TYPICAL STEEL PIPE JOINTING – LEAD AND RR JOINTS

SW 31 COMMENTARY ON WAT-1800 SERIES – DUAL WATER RETICULATION SYSTEMS

TABLES

- TABLE SW 28.1 MINIMUM TRENCH DIMENSIONS